

S.M.S.L®



Made in China



<http://smsl-audio.com>

S.M.S.L®

说明书  
Manual

## 1. 部件介绍

尊敬的用户，  
非常感谢您选择深圳市双木三林电子有限公司的Sanskrit 解码器。Sanskrit 采用了先进的设计及高级的发烧元器件精制而成。Sanskrit 精良的做工,时尚的外观,简捷的操作,完美的音质。将给您带来高贵的视觉、听觉感受。

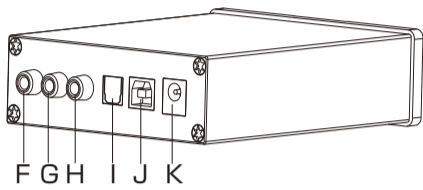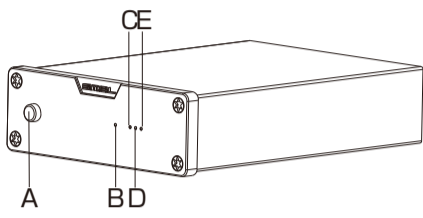

- A. 选择开关
- B. 待机/开机指示灯
- C. 同轴选择指示灯
- D. 光纤选择指示灯
- E. USB选择指示灯
- F. 右声道输出
- G. 左声道输出
- H. 同轴输入
- I. 光纤输入
- J. USB输入
- K. 电源输入

1

## 2. 主要部件功能介绍

- A. 选择开关
  - (1). 长按1秒为开机/待机选择。
  - (2). 短按为USB/光纤/同轴输入信号的选择。
  - ☆ 选择不同的信号输入,面板的指示灯相应地点亮。
- B. 待机/开机指示灯,待机为红色,开启机器为绿色。
  - ☆ 无信号输入时绿色LED灯闪烁。
- C. 同轴选择指示灯,选择同轴输入,此灯点亮。
- D. 光纤选择指示灯,选择光纤输入,此灯点亮。
- E. USB选择指示灯,选择光纤输入,此灯点亮。
- K. 电源输入插座,务必使用原机搭配的DC9V电源适配器.电压不可以超出DC9V,否则会造成机器损坏。

2

## 3. 技术指标

- 输入方式: USB/光纤/同轴
- 输出电平: 2.0Vrms
- THD+N: 0.0007%(-3dBFS)
- 动态范围: 113dB
- 信噪比: 115dB
- 通道分离度: 113dB
- USB传输方式: 异步传输
- USB兼容性: Windows XP/7/8/8.1;  
Mac OS X 10.6以上;  
IOS 5.0以上(需要配合相机套件);  
Linux;  
Android 4.0以上(需要使用OTG线)
- 位深: USB 16bit-32bit  
光纤,同轴 16bit-24bit
- 采样率: 32KHz-192KHz
- 功率消耗: 3.1W
- 待机消耗: 0.8W
- 配置: Sanskrit 主机一台,说明书一本(中英文),双木三林定制USB线一条,带认证电源适配器一个。

3

## 4. 本机特点

- 内置MCU控制,具有断电记忆功能。
- 具有电源状态记忆功能。
- 全铝合金机身,工艺更出色。
- 单键选择控制简化了操作方式,使用更加方便。
- 全球通用电源适配器(100-240VAC无需转换)。
- 使用双木三林定制USB线。

4

## 5. 警告

- ▲ 为了减少发生火灾或触电的危险,请勿让本装置淋湿或者受潮。不要把机器安装在诸如书橱或者壁橱等狭隘不通风的地方。
- 为了防火灾,请勿让报纸,桌布,窗帘等盖住装置的通风孔。
- 也不可在装置上点放蜡烛和蚊香。
- 为了防止火灾或者触电,不可再装置上摆装饰花瓶等满装液体的物体。
- 安装本系统,以便发生故障时可以立即将交流电源从墙壁插座上拔除。
- 请勿让电池过度受热,如收到阳光直射或接触到火源等。
- 有触电危险严禁拆开。
- 内部没有维修配件,维修请咨询具备资格专业人士。
- 为防止触电严禁拆开外壳,维修请咨询具备资格专业人士。
- 仅限室内使用。

5



## 6. 保修条款

- 一、服务期限  
深圳市双木三林电子有限公司承诺产品的良好品质,产品自售出之日7天内正常使用情况下出现故障,客户可以选择退货或者保修(不影响二次销售才可以退货)。正常使用一年内出现故障可以免费保修。
- 二、购买日期以销售商开出的购机发票或收据日期为准,网购可以以交易截图为准。
- 三、有以下情况都不能享受“三包”服务
  - (1).一切人为因素损坏,包括非正常工作环境下使用或不按照说明书使用;
  - (2).用户私自拆机、改装、维修;
  - (3).使用非指定或许可的配件造成损坏的;
  - (4).机身的QC或保修贴损毁;
  - (5).不能出示有效购机凭证;
  - (6).不属于本公司产品;
- 四、保修方式为送修  
此条款仅适用于中国大陆,其他地区请参考当地销售代理商的规定和国家法规。

6

## 1. Parts names

Dear users:  
Thank you for purchasing Shenzhen shuangmusanlin Electronics Co., Ltd. the Sanskrit DAC. The Sanskrit DAC uses advanced design and high-level hi-fi components manufacturing. Sanskrit DAC, excellent workmanship, stylish appearance, simple operation and perfect sound quality. Will give you a noble vision, hearing, feeling.

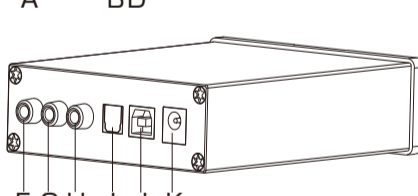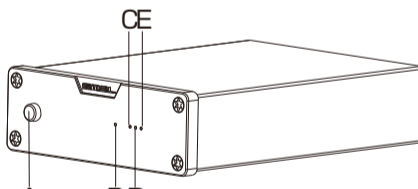

- K. Power INPUT
- J. PC-USB INPUT
- I. Optical INPUT
- H. Coaxial INPUT
- G. Left channel output
- F. Right channel output
- D. Optical INPUT indicator
- C. Coaxial INPUT indicator
- B. Standby / power-on indicator
- A. Select switch
- E. USB INPUT indicator

7

## 2. Operation

- A. selector switch
  - (1). Long press means turn ON or OFF;
  - (2). Short press to select the input,USB/OPTICAL/COAXIAL cyclically
  - ☆ different signal input, the corresponding location of the panel lights brighter.
- B. Standby / power-on LED, standby for the red, power-on for the green.
  - ☆ The green LED will flash when no signal input.
- C. Coaxial LED, select the coaxial input, this lamp is lit.
- D. Optical LED, select the coaxial input, this lamp is lit.
- E. USB LED, select the coaxial input, this lamp is lit.
- K. Power input interface.Be sure to use the machine with DC9V power adapter.Voltage can not exceed DC9V,otherwise it will cause damage to the machine

8

## 3. Specifications

- Inputs: USB/Optical/coaxial.
- Output levels: 2.0Vrms
- THD+N: 0.0007%(-3dBFS)
- Dynamic Range: 113dB
- SNR: 115dB
- Channel separation: 110dB
- USB transfer mode: Asynchronous compatible
- USB compatibility: Windows XP/7/8/8.1;  
Mac OS X 10.6(or above);  
IOS5.0(or above);  
Android4.0(or above);  
Linux;
- Bit depth: USB 16bit-32bit  
Coaxial,Optical 16bit-24bit
- Sample rate: 32kHz-192kHz
- Power consumption: 3.1W
- Power Saving State: 0.8W
- Accessories: machine×1 / manual×1 / USB wire×1 / PSE certification power adapter×1.

9

## 4. Features

- MCU control built-in ,Open or close the machine has a mute function. input select or output select with memory function in case of power-down.
- The multi-function input, the input and output LED indicators.
- All aluminum alloy shell, knob and button.
- A single button to select the control simplifies operation. Easier to use.
- Universal power adapter (100-240VAC).
- Customize USB cable.

10

## 5. Warning

- ▲ To reduce the risk of fire or electric shock, do not expose the unit to get wet or damp.
- Do not install the machine on a narrow stuffiness place such as bookcase or closet .
- To prevent fire, do not let the vents newspapers, tablecloths, curtains, etc. to cover the device.
- And do not place l ighted candles on the apparatus and mosquito coils.
- To prevent fire hazard or shock risk,please do not put object filled with liquid.
- Install this system so that you can immediately unplug the AC power cord from the wall outlet when a failure occurs.
- Risk of electric shock Do not disassemble.
- Please do not heat battery,sunshine beat it or close to file etc.
- No internal repair parts, please consult a qualified repair person.
- To prevent electric shock Do not disassemble the case, please consult a qualified repair person.
- Indoor use only.

11

## 6. Warranty terms

- (1). The term of service  
Shenzhen ShuangMuSanlinElectronics Co.,LTD promise good quality products.if product is defective unit by normal use within 7 days after purchasing. the customer can choose to return or repair warranty (does not affect the secondary sales after they can return) Faulty for free within one year warranty normal use.
- (2). Date of purchase is in accordance with invoice date or receipt date issued by seller, online shopping can cut trade shots.
- (3). Following situation can not enjoy "ThreeGuarantees" service:
  - a. All damagesby human factors, including use it under non-normal workingenvironmentthe and not follow manual instructions.
  - b. User privately disassemble, modification, maintenance;
  - c. Use non-designated or approved accessories cause damage;
  - d. QC or warranty stickers purchasing on cabinet;
  - e. Can not provide a valid purchase on prove;
  - f. Not belong to SMSL products.
- (4). How to warranty  
This term is only suitable for china mainland , other region please refer to the policy of the local sales agents and national regulations.

12